





PWM

Understandable Wide Screen

BSCD 10-30

- LCD screen
- Manual Setting with Simple and Easy Keys
- Automatic System Voltage Recognition
- Smart PWM Charging Mode
- Automatic Temperature Compensation
- Adjustable Charge-Discharge Control Parameters
- Adjustable Working Mode
- Battery Low Voltage Disconnection
- LVD Over Current Protection
- Battery Reverse Discharge Protection
- Battery Reverse Connection Protection

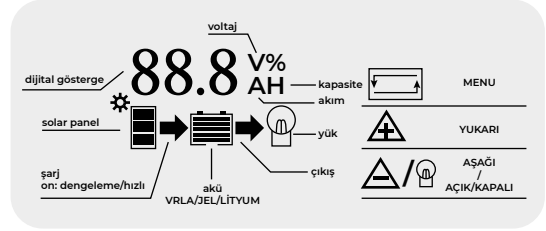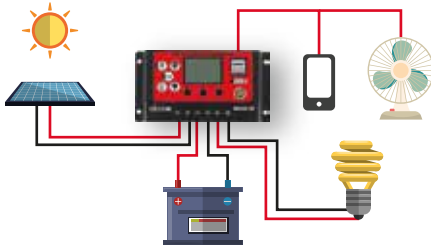

MODEL	BSCD-10	BSCD-20	BSCD-30
System Voltage	12/24v Otomatik tanıma		
Charge Current	10A	20A	30A
Discharge Current	10A	20A	30A
Max Solar Input	<50V		
Battery Type	b01 Sealed/b02 GEL/b03 Flood		
Qqualization	14.4V	14.2V	14.6V
Float Voltage	13.7V(default,adjustable)		
Discharge Stop	10.7V(default,adjustable)		
Discharge Reconnect	12.6V(default,adjustable)		
Constant Charging Voltage	3.6V*4	4.2V*3/*4	
Recovery Charge Voltage	3.4V*4	4.0V*3/*4	
Low Voltage Protection	2.6V*4	3.1V*3/*4	
Low Voltage Recovery	2.9V*4	3.7V*3/*4	
Usb Output	5V/2A		
Self Consume	<10mA		
Operating Temperature	-35-60°C		
Size/Weight	133*70*34mm/154g		

Note: Depending on the needs, technical specifications can be updated.